

543,160

Rec'd PCT/PTO 25 JUL 2005

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



10/543160



(43) International Publication Date  
10 September 2004 (10.09.2004)

PCT


(10) International Publication Number  
WO 2004/077892 A1

- (51) International Patent Classification<sup>7</sup>: H05B 41/26 (71) Applicant and  
(21) International Application Number: PCT/KR2003/001569 (72) Inventor: MOON, Seong-jin [KR/KR]; na-303, Buil  
APT., 437-1, Bupyeng-dong, Bupyeng-gu, Incheon-si  
403-010 (KR).  
(22) International Filing Date: 5 August 2003 (05.08.2003) (74) Agents: LEE, Ju-Ki et al.; 3rd Floor, Ducksung Bldg,  
636-16 Yeoksam-dong, Kangnam-ku, Seoul 135-908 (KR).  
(25) Filing Language: English (81) Designated States (*national*): BR, CA, CN, JP, MX, US,  
ZA.  
(26) Publication Language: English (84) Designated States (*regional*): European patent (DE, ES,  
FR, GB, IT, NL).  
(30) Priority Data:  
10-2003-0011954  
26 February 2003 (26.02.2003) KR  
Published:  
— with international search report

(71) Applicant (for all designated States except US): GEN-  
ERAL TECHNOLOGY CORPORATION [KR/KR];  
485-10, 2-ga, Palbok-dong, Deokjin-gu, Jeonju-si, Jeol-  
labuk-do 561-844 (KR).

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: INSTANTANEOUS ELECTRONIC BALLAST FOR METAL HALIDE LAMP HAVING STATE TRANSITION CIR-  
CUIT

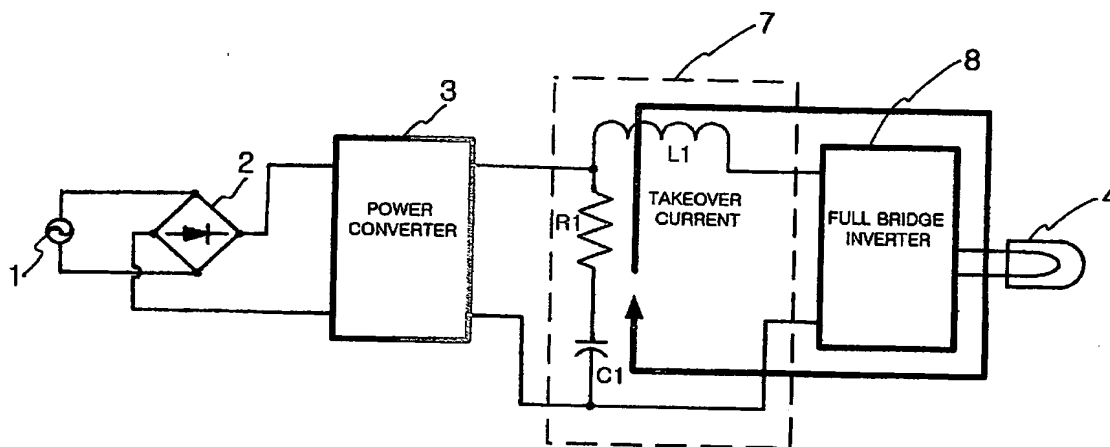

(57) Abstract: Disclosed is an electronic ballast for a metal halide lamp. In particular, the present invention relates to an instantaneous electronic ballast for a metal halide lamp, which allows instantaneous lightening of the lamp and can extend the life of the lamp. For this, the instantaneous electronic ballast includes a state transition circuit having a first capacitor, a first resistor and a first inductor that are sequentially serially connected between the output terminals of a power converter, for switching the output voltage region, thus driving the metal halide lamp, and the input terminals of the metal halide lamp, for supplying a state transition current necessary to shift the metal halide lamp from a glow discharge phase to an arc discharge phase.

WO 2004/077892 A1

**INSTANTANEOUS ELECTRONIC BALLAST FOR METAL HALIDE LAMP**  
**HAVING STATE TRANSITION CIRCUIT**

**5    Technical Field**

          The present invention relates to an electronic ballast for a metal halide lamp, and more particularly, to an instantaneous electronic ballast for a metal halide lamp which allows instantaneous lightening of the lamp, by supplying a state transition current that shifts the internal state of the lamp from a glow discharge state to an arc discharge state through an additional circuit when the metal halide lamp is initially turned on.

15

**Background Art**

          In general, a metal halide lamp is a high pressure mercury discharge lamp containing a halogen compound. This lamp has a low mercury steam pressure before it is turned on. After the lamp is turned on, however, the mercury steam pressure is increased as temperature is increased within the lamp. If the mercury steam pressure reaches a normal state, the lamp has better properties in optical efficiency than a low pressure mercury discharge lamp.

25

          The metal halide lamp has better optical properties than the low pressure discharge lamp, i.e., a high pressure sodium lamp (HPS) being a high pressure discharge lamp as well as a fluorescent lamp and a low pressure sodium lamp. In other words, major properties of the lamp are the general color rendering index representing the degree of color reproduction fidelity of a subject and luminous efficiency (lm/W) representing the correlation between the

30

brightness and economy. From FIG. 1, it can be seen that the metal halide lamp has better optical properties than the fluorescent lamp, the low pressure sodium lamp and the high pressure sodium lamp (HPS). In view of the above, the  
5 use of the metal halide lamp is increased.

As above, the metal halide lamp having the good optical properties is turned on through the following operational phases. In other words, as shown in FIG. 2, the metal halide lamp is lightened through a breakdown phase  
10 where discharge is started, a glow discharge phase by collision of ions and an arc discharge phase by emission of hot electrons.

In other words, if the lamp voltage is continuously applied to both ends of the electrode in the metal halide  
15 lamp until the initial discharge voltage that breaks down a gas insulating status within the voltage is applied to both ends of the electrode, discharge is broken down. At this time, if a sufficient current is applied, the discharge uniformly occurs over the entire portion of the cathode  
20 electrode and the glow discharge phase where sonorous light is emitted is entered. In this period, the voltage between both ends of the lamp electrode is constantly kept for a given time regardless of variation in the current.

Thereafter, if more current is supplied, ionization  
25 within the lamp is further accelerated, which begins to heat the cathode. If the cathode's temperature reaches a given level, the cathode enters the hot electron discharge phase to reach the arc discharge phase where bright light is emitted.

30 FIG. 3 is a circuit diagram illustrating the construction of a conventional electronic ballast for lightening the metal halide lamp operated as above. A reference numeral 1 indicates an AC power. A rectifier 2

for converting the AC power into the DC power is connected between the output terminals of the AC power supply 1. A power converter 3 for switching the DC power outputted from the rectifier 2 to generate a voltage having a given frequency, is connected between the output terminals of the rectifier 2.

A metal halide lamp 4 is connected between the output terminals of the power converter 3. Further, there are provided a current sensor 5 for sensing a normal current and a state transition current, which are supplied to the metal halide lamp 4 (current to keep a lightening state of the lamp), and a power converter controller 6 for controlling the power converter 3 depending on the normal current or the state transition current sensed through the current sensor 5.

If the rectifier 2 of the electronic ballast constructed above converts the AC power into the DC power, the power converter 3 supplies the state transition current to the metal halide lamp 4. At this time, the supplied state transition current is sensed by the current sensor 5 of the power converter 3 and is then transmitted to the power converter controller 6.

As the metal halide lamp 4 has a state where the current does not flow into the lamp 4 before it is discharged, it looks like that the metal halide lamp 4 being a load is not connected, from the viewpoint of the power converter 3. If the metal halide lamp 4 is discharged, however, it becomes a discharge state and has a state where the current can flow into the lamp 4 being the load. At this time, the power converter 3 supplies the state transition current and the normal current to the metal halide lamp 4 being the load at the same time. Next, the two currents supplied by the power converter 3 are detected

by the current sensor 5, which are then used as current control information of the power converter 3.

In the conventional electronic ballast for the metal halide lamp, the current profile for state transition when the lamp is initially lightened could not be adequately controlled. Therefore, there is a problem that instantaneous lightening of the metal halide lamp is difficult.

In other words, if the glow discharge state lasts for a long time, there is a problem that the life of the metal halide lamp is shortened, etc. For this reason, rapid transition from the glow discharge phase to the arc discharge phase is required. Due to this, the conventional electronic ballast has problems that instantaneous lightening of the metal halide lamp is difficult, and a problem that the life of the lamp is shortened cannot be overcome.

#### **Disclosure of Invention**

20

Accordingly, the present invention has been made in view of the above problems, and it is an object of the present invention is to provide an instantaneous electronic ballast for a metal halide lamp, which allows instantaneous lightening of the lamp and can extend the life of the lamp, by supplying a state transition current through a state transition circuit capable of controlling the current profile of the state transition current that shifts the internal state of the lamp from a glow discharge state to an arc discharge state when the metal halide lamp is initially lightened.

To achieve the above objects, according to the present invention, there is provided an electronic ballast for a

metal halide lamp having a power converter for switching the output voltage of a rectifier that converts an AC power into a DC power to generate a voltage having a given frequency within a high frequency region, thus driving the metal halide lamp, a current sensor for sensing the current to be used as current control information of the power converter, and a power converter controller for controlling the power converter in response to the sensed signal of the current sensor, including a state transition circuit having a first capacitor, a first resistor and a first inductor that are sequentially serially connected between the output terminals of the power converter and the input terminals of the metal halide lamp, for supplying a state transition current necessary to shift the metal halide lamp from the glow discharge phase to the arc discharge phase.

Further, the current sensor may be installed at the front of the state transition circuit to sense only a normal current being a current for keeping a lightening state of the lamp, which is applied from the power converter to the metal halide lamp.

In another aspect of the present invention, there is provided an instantaneous electronic ballast for a metal halide lamp having a power converter for switching the output voltage of a rectifier that converts an AC power into a DC power to generate a voltage having a given frequency within a high frequency region, thus driving the metal halide lamp, a current sensor for sensing the current to be used as current control information of the power converter, and a power converter controller for controlling the power converter in response to the sensed signal of the current sensor, including a state transition circuit having a second capacitor, second and third resistors that are connected in parallel, and a second inductor, all of which

are sequentially serially connected between the output terminals of the power converter and the input terminal of the metal halide lamp, for supplying a state transition current necessary to shift the metal halide lamp from a glow discharge phase to an arc discharge phase.

In the above, the time constant of the second resistor through which a charge current flows from the power converter to the second capacitor may be set significantly higher than that of the third resistor through which a discharge current flows from the second capacitor to the metal halide lamp.

Further, the instantaneous electronic ballast for the metal halide lamp may further include second and third diodes for preventing backward voltages, which are serially connected on the input terminal' side of the second resistor through which a charge current flows from the power converter to the second capacitor, and the output terminal' side of the third resistor through which a discharge current flows from the second capacitor to the metal halide lamp, respectively.

Furthermore, the current sensor may be installed at the front of the state transition circuit to sense only the normal current being the current for keeping the lightening state of the lamp that is applied from the power converter to the metal halide lamp.

### **Brief Description of the Drawings**

Further objects and advantages of the invention can be more fully understood from the following detailed description taken in conjunction with the accompanying drawings in which:

FIG. 1 is a graph illustrating optical properties of a

conventional lamp,

FIG. 2 is a graph illustrating phases in which an electronic ballast for a common metal halide lamp is lightened,

5 FIG. 3 is a circuit diagram illustrating the operation of the electronic ballast for a conventional metal halide lamp,

FIG. 4 is a circuit diagram illustrating the construction of an electronic ballast according to a first  
10 embodiment of the present invention,

FIG. 5 is a circuit diagram illustrating the construction of an electronic ballast according to a second embodiment of the present invention, and

FIG. 6 is a circuit diagram illustrating the  
15 construction of an electronic ballast according to a third embodiment of the present invention.

### **Best Mode for Carrying Out the Invention**

20 The present invention will now be described in detail in connection with preferred embodiments with reference to the accompanying drawings.

FIG. 4 ~ FIG. 6 are circuit diagrams illustrating the constructions of instantaneous electronic ballasts for  
25 metal halide lamps according to several embodiments of the present invention, in which like reference numerals are used to identify the same or similar parts.

FIG. 4 is the circuit diagram illustrating the construction of the instantaneous electronic ballast for  
30 the metal halide lamp according to the first embodiment of the present invention.

A rectifier 2 for converting the AC power into the DC power is connected between the output terminals of an AC



power supply 1. A power converter 3 for switching the DC power of the rectifier 2 to generate a voltage having a given frequency within a high frequency region is connected between the output terminals of the rectifier 2.

5 Further, a state transition circuit 7 of the present invention for supplying a state transition current necessary to shift the lamp 4 from a glow discharge phase to an arc discharge phase, is connected between the output terminals of the power converter 3 and the input terminals  
10 of a metal halide lamp 4. The state transition circuit 7 has a first capacitor C1, a first resistor R1 and a first inductor L1, which are sequentially serially connected. The profile of the state transition current of the metal halide lamp 4 can be adequately controlled by properly setting the  
15 time constants of the first capacitor C1, the first resistor R1 and the first inductor L1.

In FIG. 4, an unexplained reference numeral 8 indicates a full bridge inverter for inverting the polarity of the voltage applied to the metal halide lamp 4.

20 The method of operating the instantaneous electronic ballast for the metal halide lamp constructed above will now be described.

Before the metal halide lamp 4 is discharged, the first capacitor C1 of the state transition circuit 7 is  
25 charged with a voltage same to the output voltage of the rectifier 2. If the metal halide lamp 4 being a load has a state where the current can flow into the lamp 4, however, the voltage at both ends of the metal halide lamp becomes significantly lower than the charge voltage of the first  
30 capacitor C1. Therefore, as the voltage of the first capacitor C1 is higher than the voltage at both ends of the metal halide lamp 4 being the load, the voltage charged into the first capacitor C1 is discharged toward the metal

halide lamp 4.

At this time, the current that is provided to the metal halide lamp 4 by the first capacitor C1 serves as the state transition current. The profile of the current that is applied to the metal halide lamp 4 by the first capacitor C1 is varied depending on the time constants of the first capacitor C1, the first resistor R1 and the first inductor L1. Therefore, the profile of the state transition current can be controlled to be suitable for instantaneous lightening of the metal halide lamp 4 by properly adjusting the time constant values.

As above, if the metal halide lamp 4 enters the arc discharge phase where a bright light is emitted due to the application of the state transition current, the normal current for keeping the lightening state of the metal halide lamp 4 is supplied to the metal halide lamp 4 via the power converter 3. Thus, the lamp 4 maintains the lightening state.

Meanwhile, a current sensor 5 may be installed at the front and rear of the state transition circuit 7. If the current sensor 5 is installed at the front of the state transition circuit 7, only the normal current applied to the metal halide lamp 4 is sensed by the current sensor 5. The sensed normal current is used as current control information of the power converter 3.

On the contrary, if the current sensor 5 is installed at the rear of the state transition circuit 7, both the state transition current and the normal current applied to the metal halide lamp 4 are sensed by the current sensor 5. According to experimental results, however, it was found that the case where the current sensor 5 is installed at the front of the state transition circuit 7 improves the efficiency of the ballast.

FIG. 5 is the circuit diagram illustrating the construction of the instantaneous electronic ballast for the metal halide lamp according to the second embodiment of the present invention. The instantaneous electronic ballast shown in FIG. 5 has the same construction to those shown in FIG. 4 except for the construction of the state transition circuit installed between the output terminals of the power converter 3 and the input terminals of the metal halide lamp 4. Therefore, detailed explanation on it will be omitted in order to avoid redundancy.

As shown in FIG. 5, the state transition circuit has a second capacitor C2, second and third resistors R2 and R3 that connected in parallel, and a second inductor L2, all of which are sequentially serially connected. The time constant of the second resistor R2 through which a charge current flows from the power converter 3 to the second capacitor C2, is set significantly higher than the time constant of the third resistor R3 through which a discharge current flows from the second capacitor C2 to the metal halide lamp 4. A first diode D1 for preventing the backward voltage is serially connected to the output terminal of the third resistor R3.

Accordingly, if the second capacitor C2 is charged with the voltage, the charge current flows from the power converter 3 to the second capacitor C2 through the second resistor R2. If the metal halide lamp 4 is discharged, the voltage charged into the second capacitor C2 is higher than the voltage at both ends of the lamp being the load. Thus, the voltage charged into the second capacitor C2 is discharged toward the lamp 4 through the second and third resistors R2 and R3. At this time, as the time constant of the second resistor R2 is significantly higher than the time constant of the third resistor R3, most of the

discharge currents discharged from the second capacitor C2 are applied to the metal halide lamp 4 being the load through the third resistor R3, whereby the state of the metal halide lamp 4 is shifted.

5        FIG. 6 is the circuit diagram illustrating the construction of the instantaneous electronic ballast for the metal halide lamp according to the third embodiment of the present invention. The instantaneous electronic ballast shown in FIG. 6 has the same construction to those shown in  
10        FIGS. 4 except for the construction of the state transition circuit installed between the output terminals of the power converter 3 and the input terminals of the metal halide lamp 4. Therefore, detailed explanation on it will be omitted in order to avoid redundancy.

15        As shown in FIG. 6, a state transition circuit has a third capacitor C3, fourth and fifth resistors R4 and R5 that are connected in parallel, and a third inductor L3, all of which are sequentially serially connected. Second and third diodes D2 and D3 for preventing backward voltages  
20        are serially connected on the input terminal' side of the fourth resistor R4 through which the charge current flows from the power converter 3 to the third capacitor C3, and the output terminal' side of the fifth resistor R5 through which the discharge current flows from the third capacitor  
25        C3 to the metal halide lamp 4, respectively.

Accordingly, if the third capacitor C3 is charged with the voltage, the charge current flows from the power converter 3 to the third capacitor C3 through the second diode D2 and the fourth resistor R4. If the metal halide  
30        lamp 4 is discharged, however, the voltage charged into the third capacitor C3 is higher than the voltage at both ends of the lamp being a load. Therefore, the voltage charged into the third capacitor C3 is supplied to the metal halide

lamp 4 being the load through the fifth resistor R5 and the third diode D3, whereby the state of the metal halide lamp 4 is shifted.

## 5 Industrial Applicability

As described above, according to the present invention, the present invention includes an additional state transition circuit for supplying a state transition current that shifts an internal state of a metal halide lamp from a glow discharge state to an arc discharge state when the lamp is initially lightened. A normal current for maintaining a lightening state of the metal halide lamp is applied through the power converter, and only a state transition current necessary for state transition is applied through the state transition circuit. At this time, the current profile of the state transition current can be controlled by adequately setting the time constant of the state transition circuit. Therefore, the present invention has new effects that it allows instantaneous lightening of the metal halide lamp and can improve the life of the lamp.

While the present invention has been described with reference to the particular illustrative embodiments, it is not to be restricted by the embodiments but only by the appended claims. It is to be appreciated that those skilled in the art can change or modify the embodiments without departing from the scope and spirit of the present invention.

**What Is Claimed Is:**

1. An instantaneous electronic ballast for a metal halide lamp having a power converter for switching the output voltage of a rectifier that converts an AC power into a DC power to generate a voltage having a given frequency within a high frequency region, thus driving the metal halide lamp, a current sensor for sensing a current to be used as current control information of the power converter, and a power converter controller for controlling the power converter in response to the sensed signal of the current sensor, comprising:

a state transition circuit having a first capacitor, a first resistor and a first inductor that are sequentially serially connected between the output terminals of the power converter and the input terminals of the metal halide lamp, for supplying a state transition current necessary to shift the metal halide lamp from a glow discharge phase to an arc discharge phase.

20

2. The instantaneous electronic ballast for the metal halide lamp as claimed in claim 1 wherein the current sensor is installed at the front of the state transition circuit to sense only a normal current being a current for keeping a lightening state of the lamp, which is applied from the power converter to the metal halide lamp.

25

3. An instantaneous electronic ballast for a metal halide lamp having a power converter for switching the output voltage of a rectifier that converts an AC power into a DC power to generate a voltage having a given frequency within a high frequency region, thus driving the metal halide lamp, a current sensor for sensing a current

30

to be used as current control information of the power converter, and a power converter controller for controlling the power converter in response to the sensed signal of the current sensor, comprising:

5        a state transition circuit having a second capacitor, second and third resistors that are connected in parallel, and a second inductor, all of which are sequentially serially connected between the output terminals of the power converter and the input terminal of the metal halide  
10 lamp, for supplying a state transition current necessary to shift the metal halide lamp from a glow discharge phase to an arc discharge phase.

4.        The instantaneous electronic ballast for the  
15 metal halide lamp as claimed in claim 3, wherein the time constant of the second resistor through which a charge current flows from the power converter to the second capacitor is set significantly higher than that of the third resistor through which a discharge current flows from  
20 the second capacitor to the metal halide lamp.

5.        The instantaneous electronic ballast for the metal halide lamp as claimed in claim 3, further comprising second and third diodes for preventing backward voltages,  
25 which are serially connected on the input terminal' side of the second resistor through which a charge current flows from the power converter to the second capacitor, and the output terminal' side of the third resistor through which a discharge current flows from the second capacitor to the  
30 metal halide lamp, respectively.

6.        The instantaneous electronic ballast for the metal halide lamp as claimed in claims 3 ~ 5, wherein the

current sensor is installed at the front of the state transition circuit to sense only the normal current being the current for keeping the lightening state of the lamp that is supplied from the power converter to the metal  
5 halide lamp.



FIG. 1

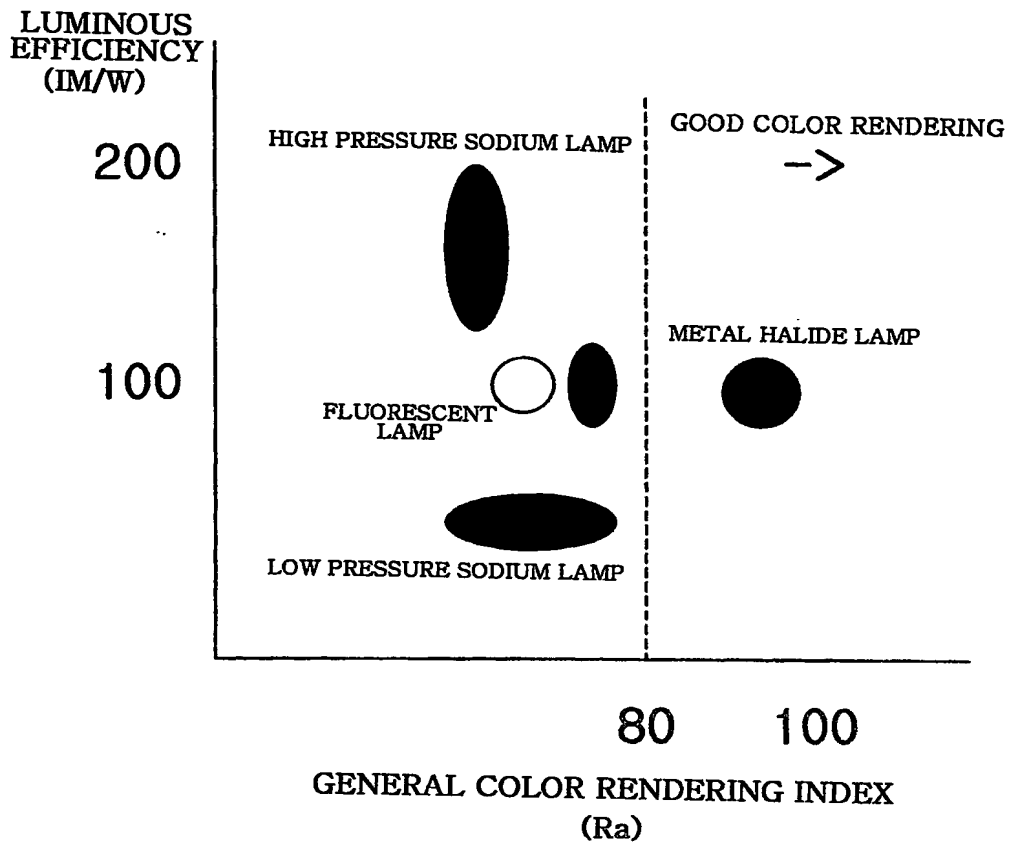


FIG. 2

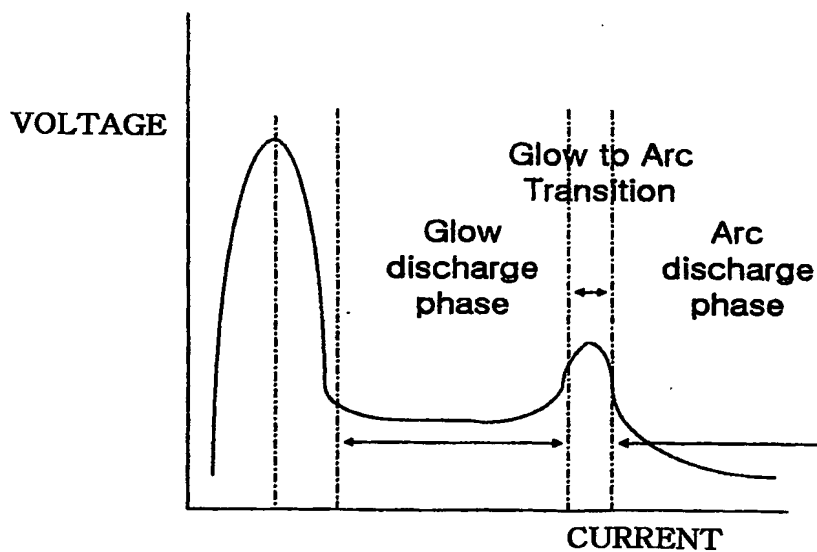


FIG. 3

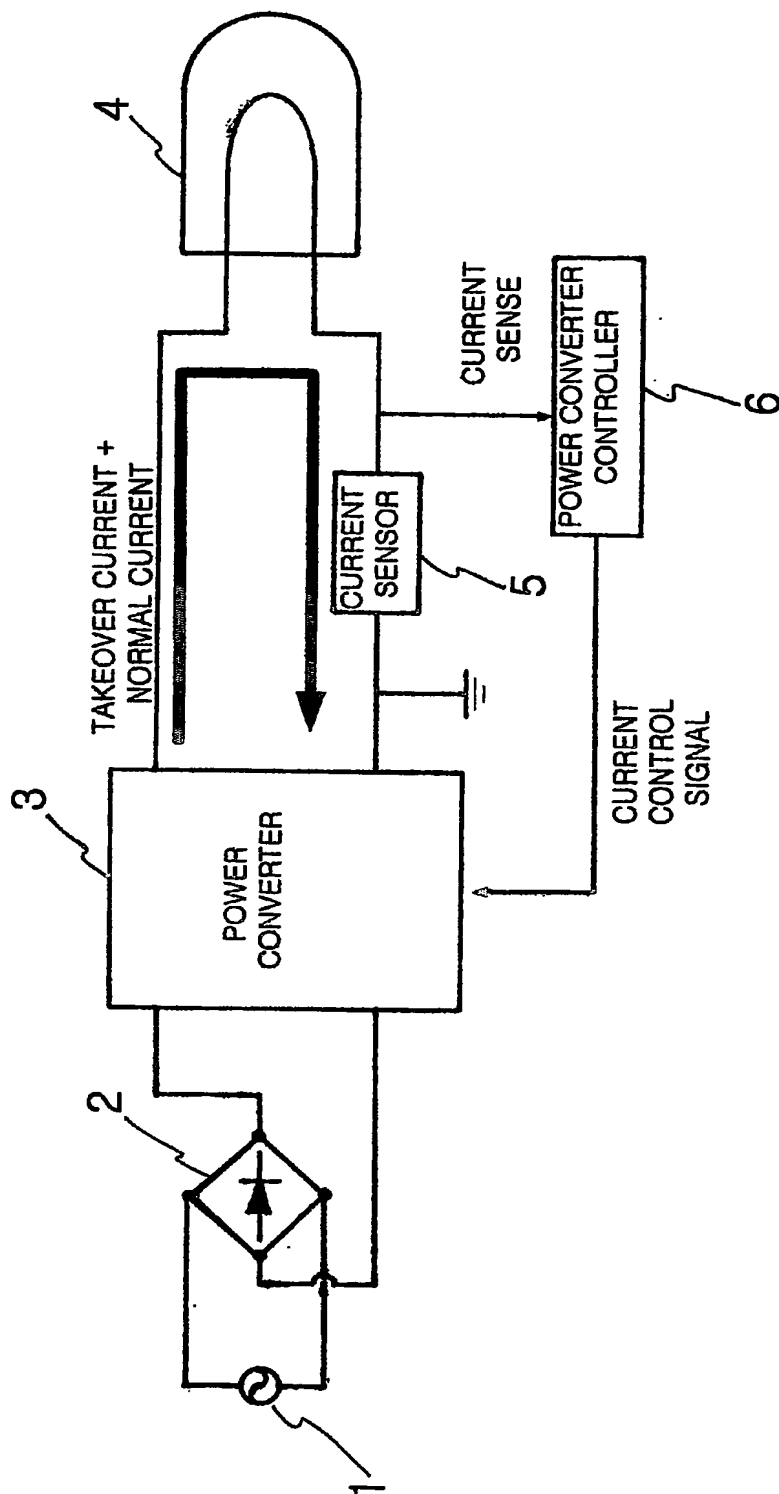


FIG. 4

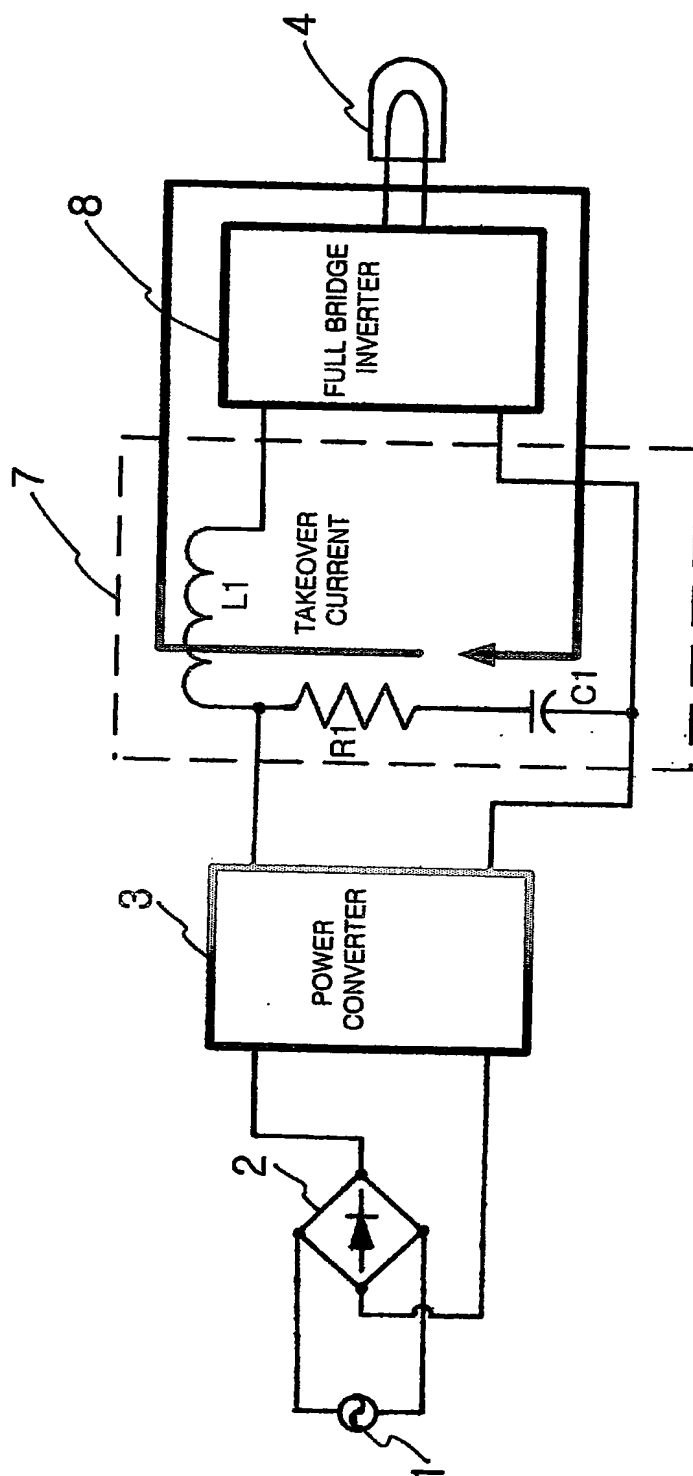


FIG. 5


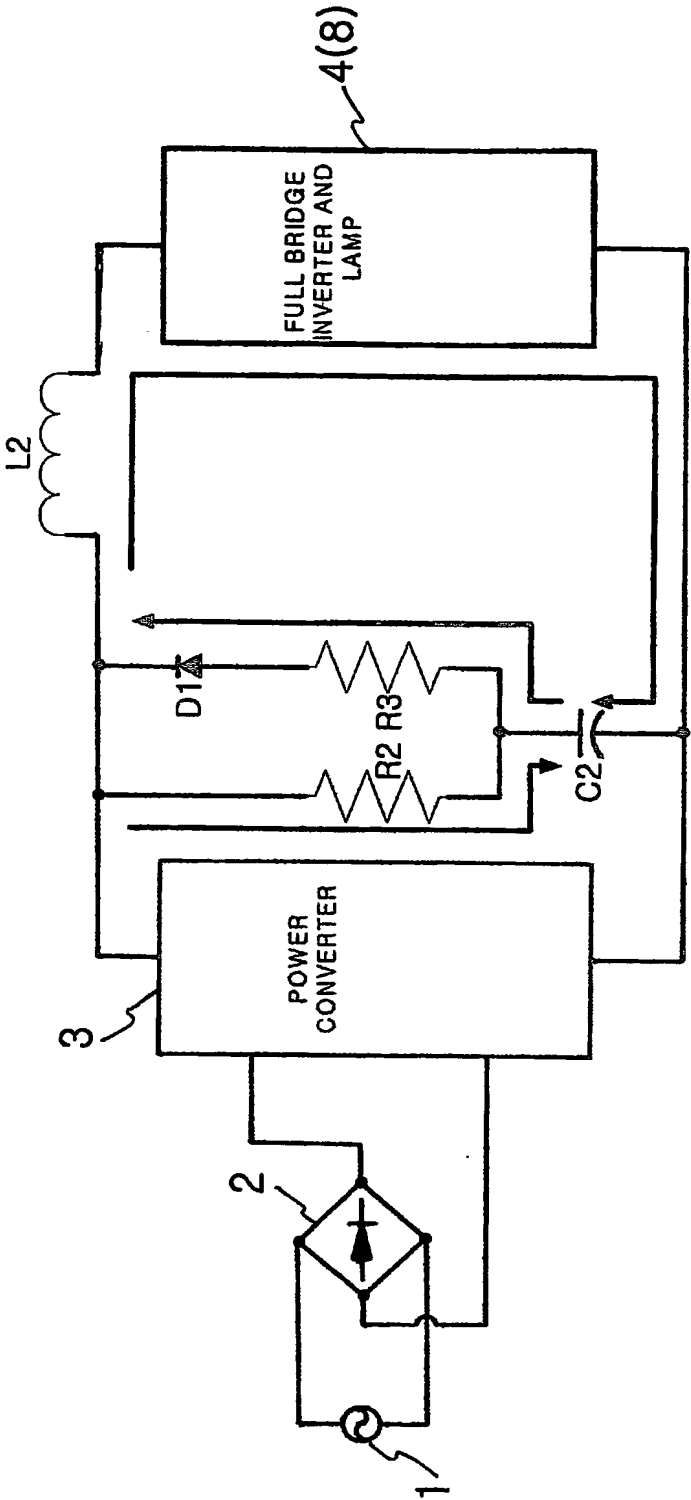


FIG. 6

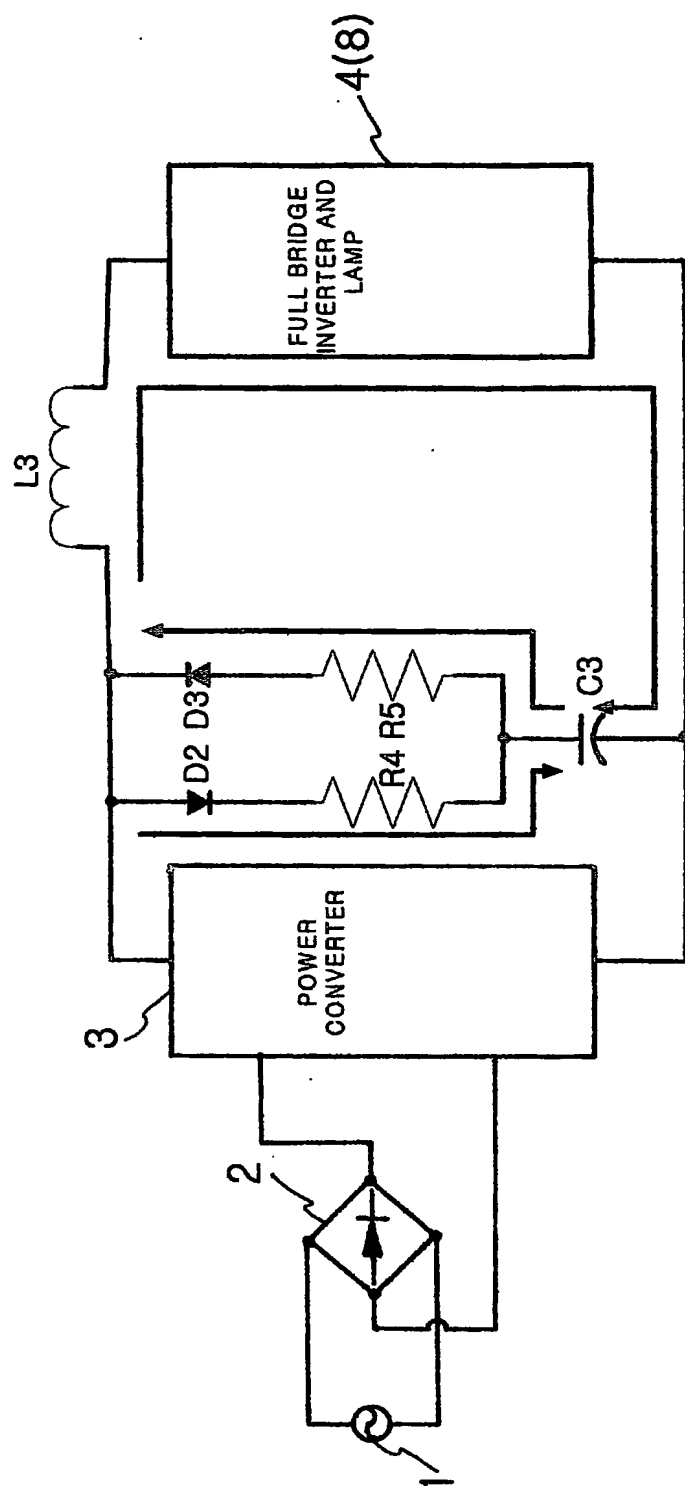

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/KR03/01569

## A. CLASSIFICATION OF SUBJECT MATTER

**IPC7 H05B 41/26**

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7 H05B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean Patents and applications for inventions since 1983

Korean Utility models and applications for Utility models since 1983

Japanese Utility models and applications for Utility models since 1975

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	JP 4-33297 A (MATSUSHITA ELECTRIC WORKS LTD) 4 FEBRUARY 1992 See the whole document	1 - 6
A	KR 95-35523 A (LG ELECTRONICS INC.) 30 DECEMBER 1995 See the whole document	1 - 6
A	JP 6-76974 A (TOSHIBA LIGHTING & TECHNOL CORP) 18 MARCH 1994 See the whole document	1 - 6

☐ Further documents are listed in the continuation of Box C.

☐ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

25 NOVEMBER 2003 (25.11.2003)

Date of mailing of the international search report

26 NOVEMBER 2003 (26.11.2003)

Name and mailing address of the ISA/KR

Korean Intellectual Property Office  
920 Dunsan-dong, Seo-gu, Daejeon 302-701,  
Republic of Korea

Authorized officer

KIM, Tae Geun

Facsimile No. 82-42-472-7140

Telephone No. 82-42-481-8118